

DECEMBER 2020 Direct Anterior Total Hip Arthroplasty Leg Positoner Assembly Page 2 Berger Block Positioner Featuring many positioners throughout Robb Leg Positioner Page 12 Auerbach Arm Holder Rake Retractor Set 1.800.548.2362 WWW.INNOMED.NET

Patient Positioning



Direct Anterior Total Hip Arthroplasty Leg Positoner Assembly Designed by Benjamin M. Frye, MD

Designed to help position the operative leg for direct anterior approach total hip arthroplasty using a standard operating table





4165-00 [Assembly]

Individual/Replacement Parts:

4165-01 [Leg Support] Overall Length: 8.75" (22,2 cm) Width: 2.5" (6,4 cm)

4165-02 [Calibrated Rod] Dimensions: 9.625" x 7.125" x 1" (24,5 x 18,1 x 2,5 cm)

4165-P [Leg Support Pad] Dimensions: 8.5" x 3" x 1.75" (21,6 x 7,6 x 4,4 cm)

4150-PS [Support Screw] T-Handle Width: 1.875" (4,7 cm) T-Handle Depth: 1.5" (3,8 cm)

9120 [Table Clamp] Dimensions: 1.7" x 1.7"" x 1.4" (4,3 x 4,3 x 3,6 cm)





USA MADE





Cherf Leg Holder Designed by John Cherf, MD

Supports the lower extremity for prepping before hip or knee surgery

Useful for all lower extremity procedures and is particularly helpful for supporting the leg with the patient positioned in the lateral position. By holding the foot/ankle in an externally rotated position, the knee can be locked into extension which helps eliminate the need for manual support.


The leg holder may also be used to support the limb for surgical patients in the supine position such as for knee and foot/ankle procedures.

PRODUCT NO'S:

Replacement Parts:

4150-PD3 [Set of 3 Small Pads]



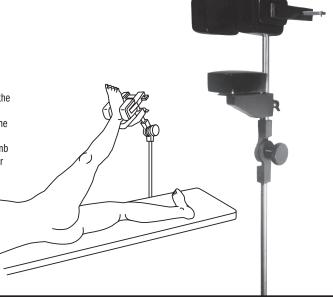

Capello Patient Positioner Designed by William Capello, MD

Provides stable positioning of a patient during hip procedures

Two-piece board design for easy handling

Interlocking board pieces





Board Dimensions: 47" x 18.75" (119,4cm x 47,6cm)

4090 [Set with 2-Piece Board] 4095 [Set with 1-Piece Board] Optional & Replacement Parts: 4090-PB [2-Piece Positioning Board] 4095-PB [1-Piece Positioning Board] 4090-06 [6" (15,2 cm) Radiolucent Peg] 4090-08 [9" (22,9 cm) Radiolucent Peg] 4090-SC [Stabilizing Clamp] 4090-01 [Large Gel Pad] 4090-EXT [Peg Extension] 4090-02 [Peg Gel Pad] [Table Clamp]

Optional two-piece board construction allows for easier use and storage. Includes: Board, Gel Pad, (4) 6" Pegs, (4) 9" Pegs, (2) Stabilizing Clamps, (2) Table Clamps. All gel pads, pegs and peg height extensions can be used with existing peg boards. The board is also available in a one-piece design.





Large Patient Peg Board Positioner Post Assembly

Especially helpful with large patients where reaching the a.s.i.s. is needed for stabilization

| PRODUCT NO'S: | | | | | |
|------------------------|--|--|--|--|--|
| 4150-10P | [Complete Set] | | | | |
| Assembly Set Includes: | | | | | |
| 4090-03 | [Post Assembly Adapter] | | | | |
| 4150-10B | [10" (25,4 cm) Post with 2 Pads] | | | | |
| 4150-EXT | [2" (5,1 cm) Spacer with 4" (10,2 cm) Knob] | | | | |
| 4150-EXT4 | [4" (10,2 cm) Spacer with 6" (15,2 cm) Knob] | | | | |

NOTE: The peg board positioner is available separately and is not included with this assembly set.





Wixson Hip Positioner

Provides stable positioning of a patient during hip surgery

The Wixson Hip Positioner is used for stable positioning of a patient during total hip and revision surgery. It is designed to be placed on top of the operating table.

The base plate is rubber-backed to reduce slipping on the table. The uprights can easily be slid in and out of the multiple slots in the plate for desired positioning and locked into position with the locking bolt. The complete upright assembly is radiolucent.

The upright pads and the base plate pad are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

The hip positioner consists of: One 10" post with double pads, one 6" post with a single pad, one 20" base plate, one base plate pad, two 2" spacers, one 4" knob, and one 6" knob.

The spacers and longer knobs are supplied for use with larger patients: use one spacer with the 4" knob, or combine the two spacers to use with the 6" knob.


The pad assembly can be adjusted for additional height and width. The upright posts are modular. The complete unit is radiolucent and autoclavable except for the foam pads.





Baseplate Dimensions: 20" x 11.25" (50,8 cm x 28,6 cm)

| | and one 6" knob. | | | | |
|-----------------|---|--|--|--|--|
| Pads. Pad Part | s, Pad Assemblies & Sets: | | | | |
| 4050-LPD | [Large Pad] | | | | |
| 4150-P | [Pad Plate] (Small Pad Attaches to this Plate) | | | | |
| 4150-PA | [Pad Assembly] (Pad Knob, Plate & Pad) | | | | |
| 4150-PB | [Pad Knob] (Attaches Pad Plate to Post) | | | | |
| | [Set of 3 Small Pads] | | | | |
| | [Case of 12 Small Pads] | | | | |
| 4150-V | [Set of 30 Velcro Strips] (For Pad Attachment) | | | | |
| | | | | | |
| | rts, Post Assemblies & Sets: | | | | |
| 4150-06 | [6" Post (15,2 cm)] (Post Only) | | | | |
| 4150-06B | [6" Post with Pad Assembly] | | | | |
| 4050-06C | [6" Post with Pad Assembly and Slider] | | | | |
| 4150-08 | [8" Custom Post (20,3 cm)] (Post Only) | | | | |
| 4150-09 | [9" Custom Post (22,9 cm)] (Post Only) | | | | |
| 4150-10 | [10" Post (25,4 cm)] (Post Only) | | | | |
| 4150-10B | [10" Post with Pad Assembly] | | | | |
| 4050-10C | [10" Post with Pad Assembly and Slider] | | | | |
| 4150-12 | [12" Custom Post (30,5 cm)] (Post Only) | | | | |
| 4150-14 | [14" Custom Post (35,6 cm)] (Post Only) | | | | |
| 4050-PDS | [Full Pad Set] (1 Large & 3 Small Pads) | | | | |
| 4150-PS | [Post Screw] | | | | |
| 4050-S | [Slider] (Connects Post to Baseplate) | | | | |
| 4150-SS | [Slider Screw] | | | | |
| Extension Parts | Extension Parts, Extension Assemblies & Sets: | | | | |
| 4150-C | [2" Spacer (5,1 cm)] | | | | |
| 4150-C4 | [4" Spacer (10,2 cm)] | | | | |
| 4150-EK | [4" Knob (10,2 cm)] For use with 2" Spacer | | | | |
| 4150-EK4 | [6" Extension Long Knob (15,2 cm)] For use with two 2" Spacers or one 4" Spacer | | | | |
| 4150-EK6 | [8" Extension Long Knob (20,3 cm)] For use with one 2" Spacer and one 4" Spacer | | | | |
| 4150-EXT | [2" Extension] (2" Spacer with 4" Knob) | | | | |
| 4150-EXT4 | [4" Extension] (4"Spacer with 6" Knob) | | | | |
| | [6" Extension] (4" and 2" Spacers with 8" Knob) | | | | |
| Baseplates: | | | | | |
| 4050-BP | [20" Standard Baseplate (50,8 cm)] (Baseplate Only) | | | | |
| 4050-BP24 | [24" Custom Baseplate (61 cm)] (Baseplate Only) | | | | |

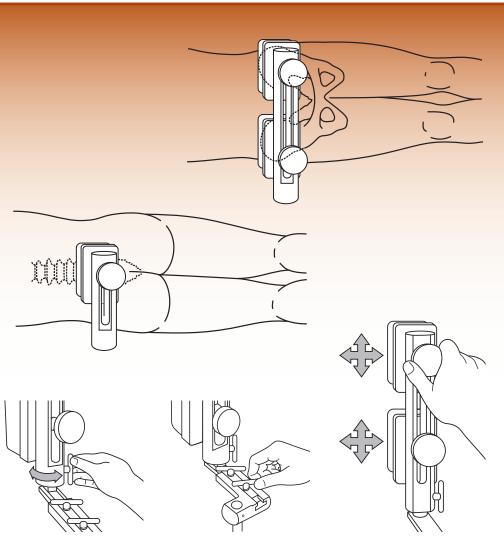

The upright assembly can be rotated and locked in place.

The upright assembly adjusts by a sliding track to accommodate various sized patients. It is locked in the sliding track by tightening one or two locking bolts.

The pads can be adjusted for height and width.



Stulberg Hip Positioner

Designed by S. David Stulberg, MD

Provides stable positioning of a patient during hip surgery

The Stulberg Hip Positioner is used for stable positioning of a patient during total hip and revision surgery. It is designed to attach directly to the operating table utilizing the existing table adapters.


The upright pads are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

The hip positioner consists of: One 10" post assembly with double pads and one 6" post assembly with a single pad, two 2" spacers, one 4" knob, one 6" knob, and two table attachments.

The spacers and longer knobs are supplied for use with larger patients: use one spacer with the 4" knob, or combine the two spacers to use with the 6" knob.

The pad assembly can be adjusted for additional height and width. The upright posts are modular. The complete unit is radiolucent and autoclavable except for the foam pads and the storage case.


| PRODUCT NO'S: | | | | | |
|-----------------|---|--|--|--|--|
| 4150-00 | [Set] Consists of: Case, one 10" post assembly with double pads, one 6" post assembly with a single pad, two 2" spacers, one 4" knob, one 6" knob, and two table attachments. | | | | |
| Dade Dad Dart | s, Pad Assemblies & Sets: | | | | |
| 4150-P | [Pad Plate] (Small Pad Attaches to this Plate) | | | | |
| 4150-PA | [Pad Assembly] (Pad Knob, Plate & Pad) | | | | |
| 4150-PB | [Pad Knob] (Attaches Pad Plate to Post) | | | | |
| | | | | | |
| 4150-PD3 | [Set of 3 Small Pads] | | | | |
| 4150-PD12 | [Case of 12 Small Pads] | | | | |
| 4150-7 | [Set of 30 Velcro Strips] (For Pad Attachment) | | | | |
| Posts, Post Par | rts, Post Assemblies & Sets: | | | | |
| 4150-06 | [6" Post (15,2 cm)] (Post Only) | | | | |
| 4150-06B | [6" Post with Pad Assembly] | | | | |
| 4150-06C | [6" Post with Pad Assembly and Slider] | | | | |
| 4150-06D | [6" Post with Pad Assembly, Slider & Table Attachment] | | | | |
| 4150-08 | [8" Custom Post (20,3 cm)] (Post Only) | | | | |
| 4150-09 | [9" Custom Post (22,9 cm)] (Post Only) | | | | |
| 4150-10 | [10" Post (25,4 cm)] (Post Only) | | | | |
| 4150-10B | [10" Post with Pad Assembly] | | | | |
| 4150-10C | [10" Post with Pad Assembly and Slider] | | | | |
| 4150-10D | [10" Post with Pad Assembly, Slider & Table Attachment] | | | | |
| 4150-12 | [12" Custom Post (30,5 cm)] (Post Only) | | | | |
| 4150-14 | [14" Custom Post (35,6 cm)] (Post Only) | | | | |
| 4150-PS | [Post Screw] | | | | |
| 4150-S | [Slider] (Connects Post to Table Attachment) | | | | |
| 4150-SS | [Slider Screw] | | | | |
| 4150-TA | [Table Attachment] | | | | |
| Extension Parts | s, Extension Assemblies & Sets: | | | | |
| 4150-C | [2" Spacer (5,1 cm)] | | | | |
| 4150-C4 | [4" Spacer (10,2 cm)] | | | | |
| 4150-EK | [4" Knob (10.2 cm)] | | | | |
| | For use with 2" Spacer | | | | |
| 4150-EK4 | [6" Extension Long Knob (15,2 cm)] For use with two 2" Spacers or one 4" Spacer | | | | |
| 4150-EK6 | [8" Extension Long Knob (20,3 cm)] For use with one 2" Spacer and one 4" Spacer | | | | |
| 4150-EXT | [2" Extension (5,1 cm)] (2" Spacer with 4" Knob) | | | | |
| 4150-EXT4 | [4" Extension (10,2 cm)] (4"Spacer with 6" Knob) | | | | |
| 4150-EXT6 | [6" Extension (15,2 cm)] (4" and 2" Spacers with 8" Knob) | | | | |
| Other Parts: | | | | | |
| 9002 | [Storage Case] | | | | |
| | | | | | |

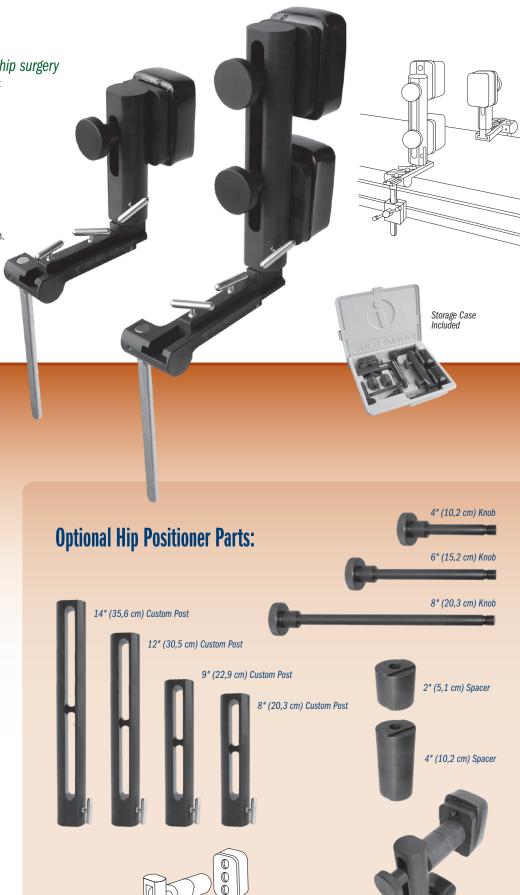

Spacer & Long Knob Combination





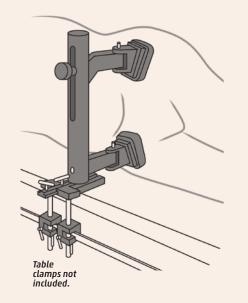



Thornberry Hip Positioner Designed by Robert L. Thomberry, MD

Designed to be adjustable yet sturdy, and is especially helpful when stabilizing a large patient during total hip and revision surgery

The Thornberry Hip Positioner is designed to attach directly to the operating table utilizing existing table clamps, or the Innomed #2595 Table Clamps, which are not included.

The upper arm assembly can be adjusted for height. Both arms include a push-button to allow the pad platform to swivel and lock into any of three fixed positions. The tall 18" post also includes a push-button to allow the post/arms unit to swivel and lock into any of three fixed positions.

The complete unit is autoclavable except for the foam pads. The pads are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

It may be necessary to place the Double Table Attachment(s) 180°-sticking out from the tableto accommodate the large patient, as shown at left.



Positioner consists of:

Front Support Unit

One 18" post assembly with a lower arm and swiveling pad platform, one upper arm assembly with a swiveling pad platform, one post knob, two pads, and one double table attachment.

One 7" post assembly, one post knob, one pad plate, one pad, one slider, and one double table attachment.



Use in Knee Surgery

Use in Hip Surgery



Berger Block Positioner Designed by Richard Berger, MD

Designed for lower extremity positioning with dual height options

| , 0 | U | ' | |
|---|---------------------------|----------|-------|
| PRODUCT NO'S: | | | |
| 2750-00 [Set] Dimensions with Pads: 4.75" x (12,1 cm | 6.75" x 8" n x 17,1 cn | n x 20,3 | 3 cm) |
| Set Includes / Available Individ | ually: | | |
| 2750-01 [Positioner On Dimensions: 4.125" x 6.125" x (10,5 cm x 15,6 cm | m) | | |
| 2750-P [Positioner Pad | Only] | | |
| [Brown Strap Only] (2) Incl | t | | |
| Optional Items: | | | |
| 2750-S [Brown Straps] | Pkg of 10 | 1 | |





PRODUCT NO'S: 2589-00 [Complete Assembly] Overall Length: 19* (48,3 cm) Individual/Replacement Parts: 2589-01 [Foot Positioner] Overall Length: 18* (45,7 cm) 2590-B [Positioner Bar] Overall Length: 19* (48,3 cm) 2730-P [Pad & Two Straps]

4150-PS [Post Screw]

Optional Parts:

2590-S [Black Straps] Pkg of 10






Durham Leg Positioner

Designed by Al Durham, MD

Supplied with a sterilizable table clamp. The pad is made of semi-dense foam to help prevent pressure points and is sealed with a washable coating.

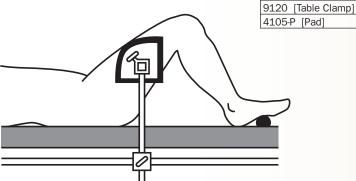


Placed against the thigh, helping to hold the leg upright in knee surgery

PRODUCT NO:
4105
Replacement Parts:





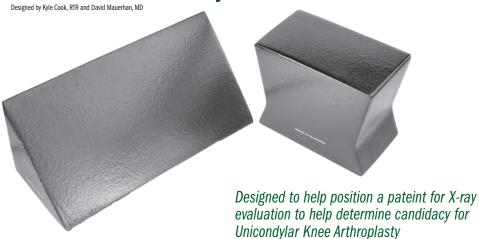


2741-00 [Set]

Individual Instruments:

2741-01 [Triangle Positioner] Dimensions: 24" x 9" x 9" (61 cm x 23 cm x 23 cm)

2741-02 [Contoured Cube] Dimensions: 11" x 9" x 6" (28 cm x 23 cm x 15,2 cm)

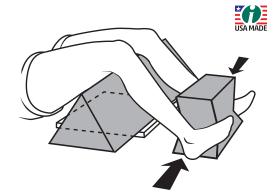



Extension Set for Anterior THR Tables

Designed by David Ott, MD

Designed to add lift to the femoral hook during an anterior THR case and be able to remove without breaking the sterile field



8004-00 [Set of One Each]

Also available individually:

8004-S [Short Extension] Extension Length: 2" (5,1 cm) Overall Length: 2.6" (6,6 cm)


8004-L [Long Extension] Extension Length: 3" (7,7 cm) Overall Length: 3.625" (9,2 cm)

Lower Extremity Leg Positioner

Designed by Ronald Romanelli, MD

Used to support knee and leg during surgery, and can be used for casting

- Utilized for rodding of femurs or tibias
- Also useful for knee surgery and closures
- Very supportive, distributes stresses on leg, used instead of bolsters
- Supplied with one autoclavable silicone pad
- Aluminum positioner is radiolucent and gas or steam sterilizable

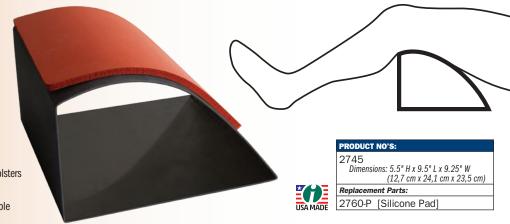



Sanders Extremity Positioning Tubes

Designed by Richard A. Sanders, M.

Designed to support the knee and ankle during lower extremity surgery

The 6" tube lifts the knee off the operating table and allows for approximately 30° of knee flexion. Very useful for closure of total knee incisions, supporting fractures of the distal femur, and tibia plateau fractures. The 4" tube elevates the foot and ankle for ankle fracture surgery. The tubes are made of aluminum, allowing them to be autoclaved. They help eliminate the need for rolled sheet bolsters.

PRODUCT NO'S:

2740-01 [Small] Diameter: 4" (10,2 cm) Width: 8" (20,3 cm) 2740-02 [Large] Diameter: 6" (15,2 cm) Width: 8" (20,3 cm)





Sanders Tube Holder

Designed by Richard Sanders, MI

Designed to help stabilize the Sanders Extremity Positioning Tubes (#2740-01 & -02)

The tube holder will help stabilize the tubes when used for lower extremity positioning for lower extremity surgery. Also, by using the tubes with the Stulberg Sliding Bolster (#2730), the knee can be placed in less flexion during the initial incision and wound closure.

PRODUCT NO

2740-03

Dimensions: 8" x 4" x 1.625" (20,3 x 10,2 x 4,1 cm)







Stulberg Sliding Bolster Designed by S. David Stulberg, MD

Helps eliminate the need for a sand bag during total knee surgery

The base plate is attached to the table and the sterile sliding bolster is placed on top of the sterile drape. The bolster can be adjusted for different angles of knee flexion during surgery.

PRODUCT NO'S:


2730

Base Dimensions: 20" x 10.5" (50,8 cm x 26,7 cm)



Kirschenbaum Foot Positioner

Helps eliminate the use of sand bags under the drape during total knee surgery

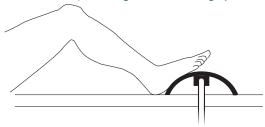

The foot rest is dome shaped for optimal foot contact and positioning the leg in flexion, and can be rotated. The unit can be used under the drape by attaching it to a standard table attachment or it can be sterilized for use on top of the drape. It can be attached to the table with the optional sterilizable table clamp. Supplied with a removable, sterilizable silicone foot pad.






Modified 90° Leg Stabilizer Designed by Gregory Fanelli, MD

Useful in total knee surgery to hold the leg in position

Helps to open up the knee joint when pressure is applied to the lower leg. Pad and sterilizable table clamp included.

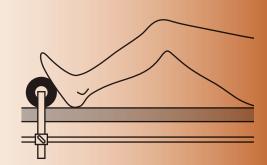

Stanton Arthroscopic Leg Holder

Sliding leg holder can be adjusted for small calves or to accommodate large thighs

Locking pin prevents sides from spreading apart

Strap can be placed high or low through the slots in the side plates to accommodate large/small limbs

Strap is strongly secured with a toothed clamp

Support rod, when clamped into a standard table clamp, helps to prevent rotation

4045

Dimensions: 16.5" L x 8.5" H x 3.5" W (42 cm L x 21,6 cm H x 9 cm W) Fits Legs: From 4" to 11" (10 cm to 28 cm)


Replacement Parts

4045-S [Strap] Overall Length: 28" (71,2 cm)



Designed to securely hold legs of various sizes for arthroscopic surgery



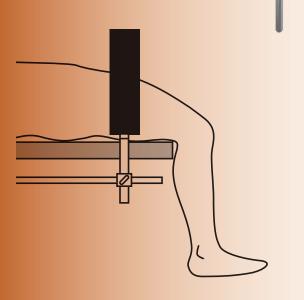

Leg Stabilizer Designed by Gregory Fanelli, MD

Useful in arthroscopic knee surgery to hold the leg in position

Helps to open up the knee joint when pressure is applied to the lower leg. Sterilizable table clamp included.

8840

Overall Length: 18.5" (47 cm) Handle Length: 9.25" (23,5 cm) Pad Diameter: 3" (7,6 cm)

Replacement Parts:

9120 [Table Clamp]

8840-P [Pad]









Provides lateral as well as superior support which allows valgus stress to open the medial compartment

Shape does not squeeze the thigh, making the need for a thigh tourniquet optional. If desired, the unit can easily be rotated out of the way without disrupting the sterile field. Using with a standard operating table clamp, the unit can easily be raised or lowered to accommodate all thigh sizes.

2735

Overall Height: 22" (55,9 cm) Post Height: 12" (30,5 cm) Pad Width: 3" (7,6 cm)

Replacement Parts

2735-P [Pad]





2629-00 [Case of 10 Sterile Pads/Wraps] 2595 [Table Clamp]



Leg Positioner Sterile Protective Pad & Wrap





2629-00 [Case of 10 Sets] 2629-L [1 Set]

Each set includes 1 Pad and 1 Wrap.



Stulberg Leg Positioner

Provides stable positioning of the knee during surgery

▶ Allows the leg to be manipulated into the desired position and securely locked in place





Base Dimensions: 20" x 10.5" (50,8 cm x 26,7 cm)


2620-10 [Stulberg Leg Positioner]

Optional & Replacement Parts:


2620-FP [Aluminum Footpiece Only] 2629-00 [Case of 10 Sterile Pads/Wraps]

Usage guide available on our website.






Loosening the Tilt Bar allows the knee to be tilted in either direction. Tightening the bar locks the Yoke System in the desired position.



The Ratchet allows the Yoke Assembly to be moved in a precise gradual manner, the length of the Track. For faster adjustments, downward pressure on the Ratchet Handle releases the Yoke Assembly which then can be easily slid the length of the Track.

Rotation Bar



Loosening the Rotation Bar allows the knee to be rotated in either direction. Tightening the bar locks the Yoke System in the desired direction.



Adjustable Knee & Tibial Positioner

Designed by Ashutosh Chaudhari, MD

Adjustable design allows for use in procedures around the knee such as tibial nailing, tibial condyle plating, patella fracture fixation, supracondylar fracture plating, supracondylar fracture nailing, and total knee replacement Radiolucent. Steam sterilizable.

2770-00 [Set]

Includes Positioner, Pad, and Two Short Straps

Individual / Replacement Parts

2770-01 [Positioner]
Overall Length (Folded): 28" (71,1 cm)
Overall Length (Flat): 54.75" (139 cm)
Maximum Triangle Height: 14" (35,6 cm)
Width: 5.5" (14 cm) Thickness (Folded): 1.8" (4,6 cm) Thickness (Flat): .75" (1,9 cm)

2770-P [Slicone Pad] Dimensions: 12" x 5.5" (30,5 cm X 14 cm)

2590-S [Short Straps] Pkg of 10

Fromm Femur & Tibia Triangles Designed by S.E. Fromm, MD * Extra Small Triangle designed by S.E. Fromm, MD & Kenneth Merriman, MD

Used for femur and tibia positioning during nailing, repairs and fractures

PRODUCT NO'S:

| Cold Comments by Net In Cots | | | | | |
|------------------------------|-------|---|--|--|--|
| 2760-03 | [16"] | Base: 9" (22,9 cm), Height: 16" (40,7 cm) | | | |
| 2760-02 | [14"] | Base: 7" (17,8 cm), Height: 14" (35,6 cm) | | | |
| 2760-01 | [11"] | Base: 6" (15,2 cm), Height: 11" (27,9 cm) | | | |
| | | of 3] Angles: Top 30°, Two Bottom 75° | | | |

2760-XS [8.5"] Base 5" (12,7 cm), Height: 8.5" (21,6 cm)

Replacement Parts:

2760-P [Silicone Pad]


2760-S [Straps] Package of 18

8120-SP [Straps for XS] Package of 10






Designed to position and hold the femur and tibia during intramedullary nailing of the tibia, ligament repairs and extremity fractures. Allows knee to be flexed greater than 90° to allow reaming and nail insertion without displacing fracture. The triangles are available in four heights: 8.5", 11", 14", and 16". The three smaller triangles are designed to fit inside the larger triangle for storage. They are supplied with an autoclavable silicone cushioning pad and velcro* straps. The triangles are also radiolucent and gas or steam sterilizable.



Tibia Reduced For:

- Open Reduction and Internal
- Fixation (ORIF)

 Application of uni- or multiplane external fixator
- · Knee ligament repairs and/ or reconstruction




Retrograde Femoral Nailing


Triangle holds femur reduced (prevents sagging)



Retrograde Femoral Nailing



Tibial Nailing

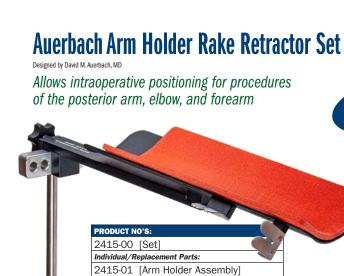

Overall Length: 20" (50,4 cm)

Arm Holder Dimensions: 14.5" x 4" (36,9 x 10,2 cm)

2415-04 [Rake Chain Retractor 4-Prong]
Two included in set, one with this product number
Overall Length including Chain: 10" (25,4 cm)
Retractor Width: .75" (1,9 cm)

2415-06 [Rake Chain Retractor 6-Prong]
Two included in set, one with this product number
Overall Length including Chain: 10" (25,4 cm)
Retractor Width: 1.25" (3,2 cm)

Two included in set, one with this product number Dimensions: 1" x 24" (2,5 x 61 cm)

2595 [Table Clamp]

Overall Width inclusing Cleats: 7.5" (19,1 cm)

2415-02 [Arm Holder Upright Rod] Overall Length: 19.25" (49,9 cm)



- Simple design for fast and easy positioning
- Connects over the drape in the sterile field using the supplied rail clamp and post
- Can be repositioned during surgery
- Sterilizable rubber pad protects the arm
- Retractors for the skin and soft tissues connect to the holder
- Compact for easy storage



Set includes: Arm Holder Upright and Assembly, (2) 4-Prong Chain Retractors, (2) 6-Prong Chain Retractors, (2) Black Straps, Silicone Pad, and Table Clamp.

Distal Humerus Fracture Board

2590-S01 [Black Strap]

Replacement Parts:


2770-P [Silicone Pad] Dimensions: 12" x 5.5" (30,5 x 14 cm)

2590-S [Black Straps] Pkg of 10

Designed by Burk Young, M

Designed for the pinning of pediatric supracondylar and adult distal humerus fractures

Allows the surgeon to pin these fractures without having to manually hold the fracture reduced, allowing the surgeon to focus on accurate pin placement and reduction. The height of the crossbar is fully adustable to accommodate different size patients. Reduction is acheved by an assistant gently applying axial traction through the forearm, with the crossbar applying the counter traction. Pinning is done with the C-arm in the lateral position. An optional separate attachment to support the arm for distal humerus fractures in adults is available. Unit not sterilizable.



PRODUCT NO'S:

2445 [Fracture Board — Pediatric]
Main Board Dimensions: 22" x 12" (55,8 cm x 30,5 cm)
Crossbar Height Adjusts From: 4.5" to 7.5" (11,4 cm x 19,1 cm)

2445-01 [Fracture Board – With Adult Adapter]

Optional/Replacement Part:

2445-06 [Adult Adapter]











PRSRT. STD. U.S. POSTAGE PAID GRAND RAPIDS, MI PERMIT NO. 748

FREE TRIAL on most instruments

Instruments are available for a no-charge two-week evaluation – includes FREE UPS Ground Shipping*

*When shipped to a hospital or medical center; additional charge applies for expedited shipping.
Free trial offer excludes implant extraction instruments, which are available as rentals. There is a pad replacement charge with the hip positioners.





Nicholson Headrest

Helps position the patient for all types of shoulder surgery in the beachchair position

Designed to provide excellent exposure to the shoulder, the headrest can be used with standard OR tables (with no modifications to the table). The headrest provides patient support and helps position the patient for all types of shoulder surgery-arthroscopic and open-in the beachchair position. It can be quickly placed and adjusted.



A gel pad forehead strap with velcro is included for optional use.

2450 [Headrest]

Main Plate Dimensions: 6" x 18" (15,2 x 45,7 cm) Neck Offset Adjustment: 8" (20,3 cm)

Includes/Replacement Parts:

2450-S [Strap with Gel Pad]

4150-PD2 [Set of 2 Pads]



Innomed, Inc

103 Estus Drive Savannah, GA 31404

Fax 912.236.7766

info@innomed.net

TOLL FREE 1.800.548.2362

















Alte Steinhauserstr. 19 CH-6330 Cham, Switzerland Fax 0041 (0) 41 740 67 71

Innomed-Europe LLC

Innomed-Europe GmbH Villingen-Schwenningen,

Deutschland Tel 0049 (0) 7720 46110 60

Fax 0049 (0) 7720 46110 61 info@innomed-europe.com